©Cherub Technology Co., Ltd.
All Rights Reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of Cherub Technology Co., Ltd.

www.nuxaudio.com
Made in China

NUX

FRONTLINE 15W

Guitar Amplifier

电吉他音箱

Owner's manual



15W
15 Watts

8 Inch
Custom Speaker

2-Channel
Hybrid Circuit

Pedal-Friendly

Built-in Effects

Bluetooth Support

WARNING

To reduce the risk of fire or electric shock, do not expose this appliance to rain or moisture.

CAUTION

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-Reorient or relocate the receiving antenna.

-Increase the separation between the equipment and receiver.

-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.



The lightning symbol within a triangle means, “Electrical caution!” It indicates the presence of information about operating voltage and potential risks of electrical shock.



The exclamation point within a triangle means, “Caution!” Please read the information next to all caution signs.

Overview


The NUX Frontline 15W is a zero-compromise powerhouse designed for the modern guitarist. Featuring an 8-inch custom-voiced speaker and a unique hybrid analog circuit, it delivers the warmth and responsiveness usually reserved for much larger rigs.

Whether you’re playing straight into the amp or using it as the perfect high-headroom canvas for your pedalboard, the Frontline 15W reacts to every nuance of your playing. With premium built-in effects and Bluetooth connectivity for streaming backing tracks, your ultimate practice session is just one plug-in away.

Features

- A fully original hybrid circuit for authentic, warm guitar tones.
- Seamlessly switch between clean and overdrive.
- 8-inch custom speaker tuned for clarity and depth.
- The ultimate "blank canvas" for your favorite stompboxes.
- Studio-quality built-in reverb & delay effect.
- NBT-1 bluetooth module support.

• Control Panel

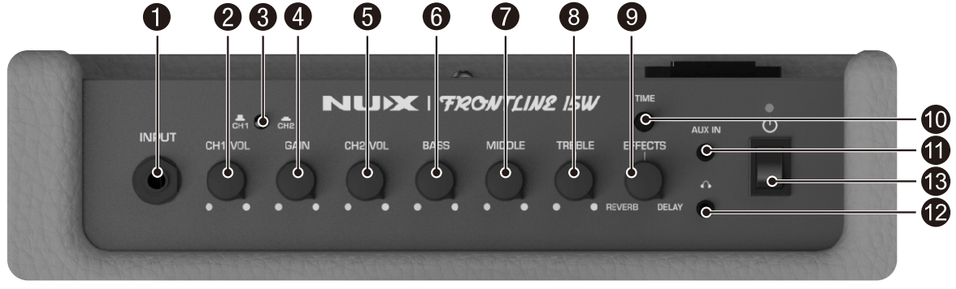

• Back Panel



Operation

❶ Input Jack
6.35mm (1/4") TS jack for instrument input.

❷ Channel (CH1) Volume
Adjusts the volume level for Channel 1.

❸ Channel Select Switch
A two-position push switch. When in the Up position, Channel 1 (Clean) is active. When Pressed, Channel 2 (Overdrive/Distortion) is active.

❹ Channel (CH2) Gain
Controls the preamp gain level for Channel 2.

❺ Channel (CH2) Volume
Adjusts the volume level for Channel 2.

❻ Bass
Adjusts the low-frequency response of the amplifier. This control is shared by both channels.

❼ Middle
Adjusts the mid-frequency response of the amplifier. This control is shared by both channels.

Operation

❽ Treble
Adjusts the high-frequency response of the amplifier. This control is shared by both channels.

❾ Effects Selector
Rotate the knob to the left side will set the effect to Reverb, rotate to the right side will set it to Delay. Left side controls the Reverb volume, right side controls the Delay volume.

❿ Effect Parameter Knob
Adjusts the Decay time when Reverb is selected, or the Time interval when Delay is selected.

⓫ AUX Input
3.5mm (1/8") TRS jack for connecting external audio devices like MP3 players or smartphones.

⓬ Headphone Jack
3.5mm (1/8") TRS output. Connecting headphones will automatically mute the internal speaker for silent practice. Use the Channel Volume control to adjust headphone volume.

⓭ Power Switch
Turns the amplifier on or off. The integrated LED indicator lights up when the unit is powered on.

⓮ Power Input
Features a built-in transformer with universal voltage support (100V-240V).

⓯ USB-C Port
Specifically designed for connecting the NBT-1 Bluetooth receiver.

Specifications

- 2 Channels： Clean and Distortion
- Power: 15W RMS
- Speaker: Custom 8’’ speaker
- 3-Band EQ
- Effects: Reverb and Delay with adjustable decay/time
- NBT-1 bluetooth module support
- Headphone output with impulse response
- Aux input for phone/CD/MP3
- Dimensions : 341(L) x 304(W) x 191(H) mm
- Weight: 6 kg

＊Specification may change without notice.

Accessories
●Power Cable ●Owner’s manual ●NUX sticker ●NBT-1 Bluetooth Module (come with Bluetooth bundle)